

PowerPrime V2 Series

1/1, 3/1, 3/3 configuration depending on model

True on-line Double Conversion UPS

10kVA - 60kVA

» Sophisticated

» Reliable

» Intelligent

» User Friendly



VFI

The PowerPrime is the ultimate in UPS design with a full range of options and accessories to meet the demands of sophisticated network environments, ideally suited for mission critical applications such as servers, network and telecommunication equipment.

The PowerPrime professional range uses state of the art technology and components to provide maximum network protection where the load is continuously supplied by the inverter with a filtered and stabilised waveform and frequency to the highest standards. Monitored by an advanced touch screen LCD control panel providing a live operational display.

- » Server Rooms
- » Financial Services
- » Healthcare
- » IT Solutions
- » Telecommunications

PowerPrime Features

ADVANCED TOUCH SCREEN WITH LCD DISPLAY

PowerPrime UPS have an advanced colour 5 inch touch screen providing precise LCD displays with real time mimic status and parameter readings via the intelligent Digital Signal Processor (DSP) controller. Touch any of the control, measure, setting, information or data log sub menu icons to enter into various sub screens.



The PowerPrime main screen can provide live operational display of the mains supply in both the Dual Feed Input and load output conditions with full graphical appreciation through five icons with touch control so that the sub menus are easily accessible.



All PowerPrime UPS include the latest DSP software technology to provide dynamic self testing which is an effective function that can be executed manually on restart to determine the UPS system is fully operational and that the site conditions are acceptable.




The display provides extensive diagnostics, controls and settings with simple touch screen pages allowing access to a variety of information and data. Measuring real parameters including AC input and output voltage, power conditions in VA/Watts/Power Factor, frequency, battery voltage, load levels, battery backup time and modes of operation.

- True On Line Double Conversion
- 1/1, 3/1, 3/3 configuration depending on model
- Advanced touch screen display
- High AC/AC efficiency up to 96.6%
- Intelligent event history / 500 alarm logs
- Unity output power factor
- Wide input voltage (110V 300V)
- Smart battery management
- Larger internal charger for long runtimes
- Parallelable up to 4 units as standard
- Standard dual feed configuration (on 10-40kVA models)
- Adjustable internal battery voltage
- Digital signal (DSP) technology
- Multiple communication ports
- ECO mode operation for energy saving
- Matching battery cabinets

UNITY POWER FACTOR

The PowerPrime range adopts DSP and highly efficient electronic IGBT inverter technology providing one of the highest power density ratios in the UPS industry. Advanced inverter circuitry delivers unity power factor maximising power output.

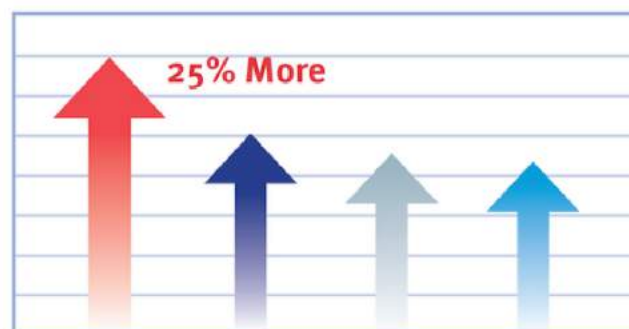


ENVIRONMENTALLY FRIENDLY ENERGY SAVING

The intelligent microprocessor based control system allows for the very low power consumption offered by the interactive ECO Mode which provides efficiencies as high as 99%. PowerPrime switches instantaneously to online double conversion operation automatically when the mains becomes unstable and fluctuates outside the normal frequency and voltage parameters.

PowerPrime Features

DUAL FEED INPUT (UP TO 40KVA)

The PowerPrime Dual Feed Input design increases the levels of reliability and availability of the UPS system which is more commonly found in larger systems. Dependability is ensured by providing from the same source a secondary path for the bypass supply to eliminate the risk of any problems with the incoming rectifier input. This superior protection allows the load to be supplied directly from the mains power source.

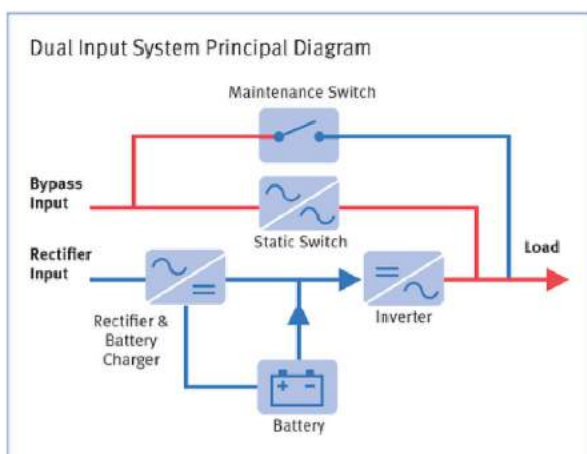

LONGER RUNTIME APPLICATIONS

For mission critical applications requiring longer runtimes or higher specification batteries, PowerPrime UPS employ an internal intelligent charging system with up to 12 Amps (18A on 60kVA model) configured by the front touch screen. Additional matching battery cabinets can easily be added and have been designed both technically and aesthetically to complement the UPS, forming a combined unit which can be easily positioned.




*Product may differ from image

MULTIPLE COMMUNICATION OPTIONS

The USB communication port can be used to locally monitor the UPS system. Internal slot is provided for SNMP communication. 8 output dry ports and 6 input dry ports are provided as standard to allow further communication with UPS.

PARALLEL READY

The BPC philosophy is both simple and elegant with each model provided parallel ready. The UPS can be connected together without any requirement to install further control circuits into the UPS system. BPC would always recommend installing one of our parallel switch panels to provide correct cable protection and aid all ongoing maintenance. Models can be used in simple parallel operation with up to 4 units, allowing scalability for increased power capacity and improved reliability due to the redundancy operation.

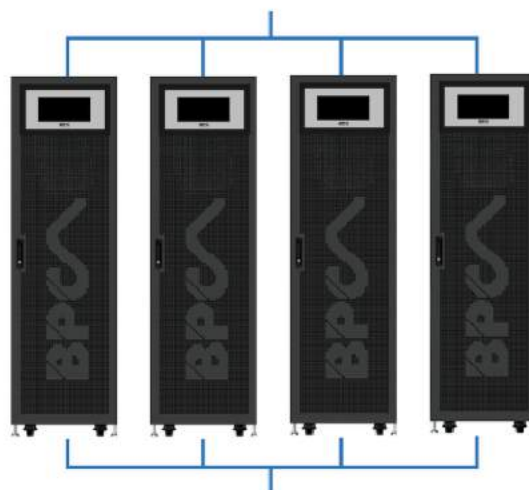

EXTERNAL MAINTENANCE BYPASS SWITCH

The PowerPrime system has an easy connection port for direct interface to an EMBS (External Maintenance Bypass Switch). This connection allows a fast communication with the internal static switch should the EMBS be closed when the UPS is operating on inverter. The EMBS connection provides security against the external switchgear being operated incorrectly. This feature helps to protect the UPS during all operations.

INPUT PHASE CONFIGURATION

The PowerPrime 10kVA and 20kVA single phase output models have configurable input terminal connections and are provided with multifunctional jumpers to allow either single phase or three phase input connections. All PowerPrime models are fitted with large connection terminals and secure gland plates to allow cable connection to the UPS.

PowerPrime Features

SMART BATTERY MANAGEMENT

Intelligent battery management combined with exceptional 95.5% DC/AC inverter efficiency means that PowerPrime battery sizing is optimised and greater runtimes are achieved. Maximum battery care is maintained by a three level charging system to achieve the best performance and operating life possible. Unique self learning function predicts more accurate backup autonomy and improves the information for the user.

COMPACT DESIGN


The PowerPrime system offers one of the smallest footprints available on the market, providing exceptional power density of 156KW/m³ at 40kVA/40kW capacity with battery in one cabinet, for the ever space conscious IT manager.

WIDE INPUT VOLTAGE

Part of the unique design of the PowerPrime is to improve the performance in extreme site conditions with a wide input voltage window, ranging from 110 Volts up to 300 Volts, without the need for the system to transfer into Battery Mode, thus not only improving the efficiency of the system, but also maximising the life of the battery.

CONFIGURABLE BATTERY VOLTAGE


The 20kVA models and above have the flexibility to configure battery voltages. Internal battery options usually have either 32 (16+16) pcs or 40 (20+20) pcs that can be configured with matching battery cabinets. Depending on application and runtime requirements, external batteries can be configured with battery variations from 32 (16+16) pcs to 40 (20+20) pcs.

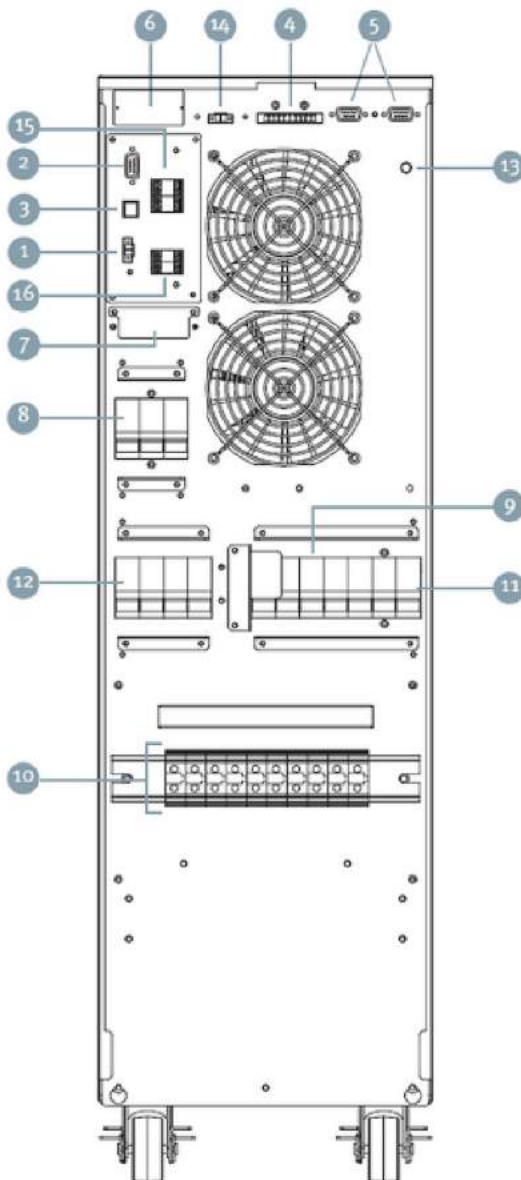


Single Phase Output 10kVA - 20kVA

- 1 Emergency power off connector (EPO connector)
- 2 RS 232 communication port
- 3 USB communication port
- 4 Parallel share current port
- 5 Parallel port
- 6 Intelligent slot SNMP or DRY port
- 7 External battery connector
- 8 Line input circuit breaker
- 9 Maintenance bypass switch
- 10 Input/Output terminals
- 11 Bypass input circuit breaker
- 12 Output Switch
- 13 Service start
- 14 External Maintenance Bypass Switch connector (EMBS)
- 15 Input DRY port terminals
- 16 Output DRY port terminals

PowerPrime Features

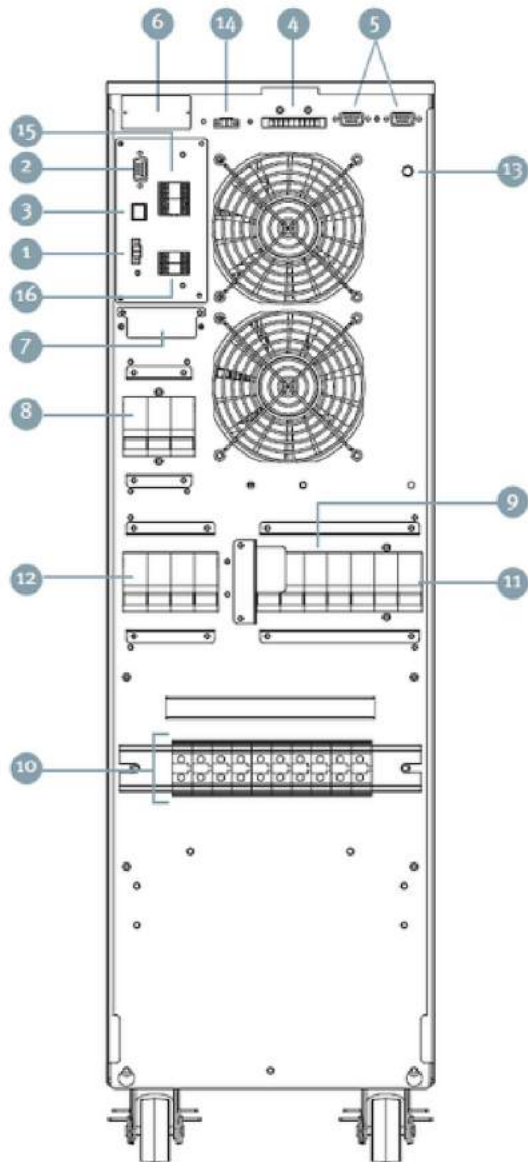

Three Phase Output 10kVA - 20kVA

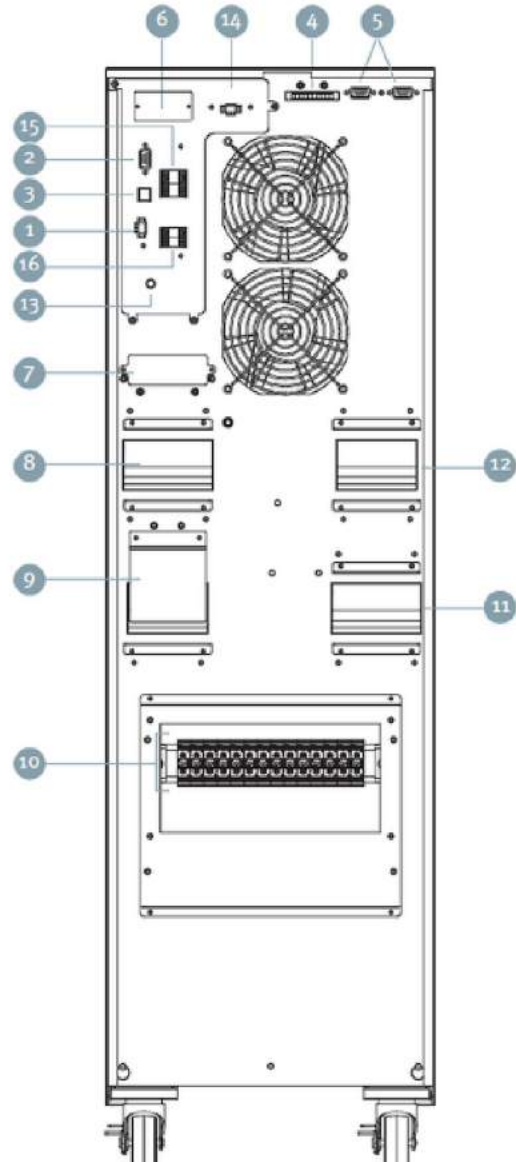


Three Phase Output 30kVA


- | | |
|---|---|
| ① Emergency power off connector (EPO connector) | ⑨ Maintenance bypass switch |
| ② RS 232 communication port | ⑩ Input/Output terminals |
| ③ USB communication port | ⑪ Bypass input circuit breaker |
| ④ Parallel share current port | ⑫ Output Switch |
| ⑤ Parallel port | ⑬ Service start |
| ⑥ Intelligent slot SNMP or DRY port | ⑭ External Maintenance Bypass Switch connector (EMBS) |
| ⑦ External battery connector | ⑮ Input DRY port terminals |
| ⑧ Line input circuit breaker | ⑯ Output DRY port terminals |

*Product may differ from image

PowerPrime Features

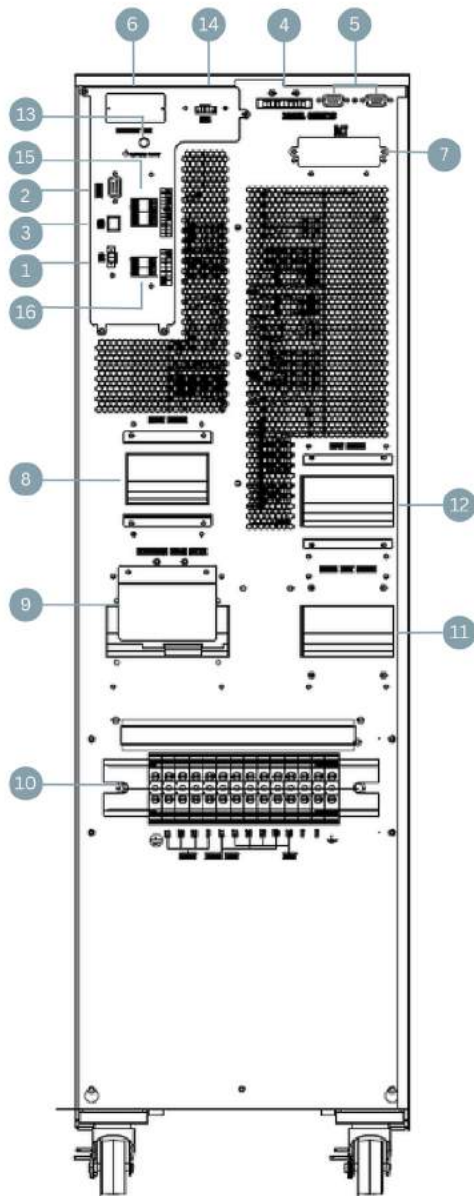

Three Phase Output 40kVA

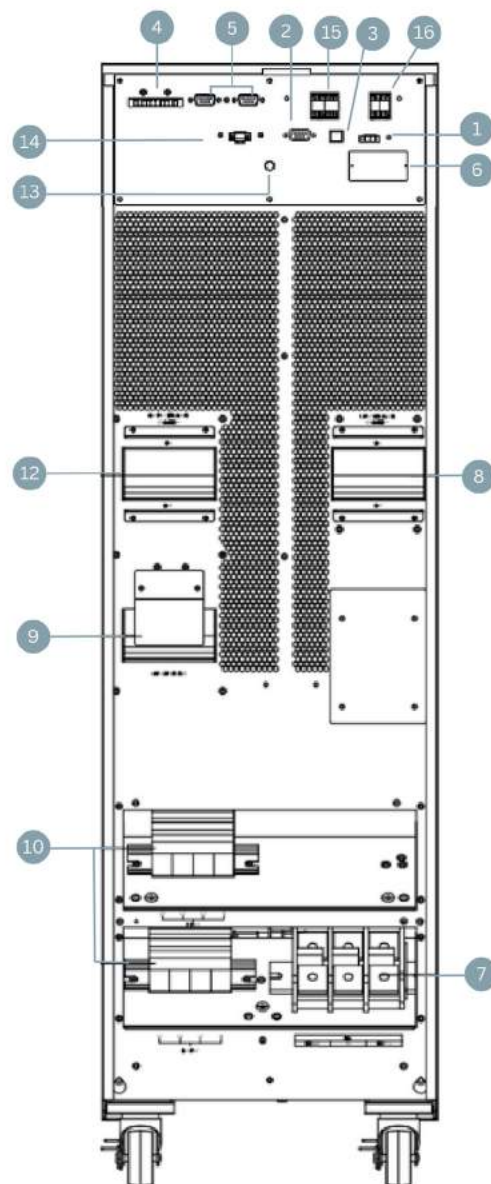

Three Phase Output 60kVA

- 1 Emergency power off connector (EPO connector)
- 2 RS 232 communication port
- 3 USB communication port
- 4 Parallel share current port
- 5 Parallel port
- 6 Intelligent slot SNMP or DRY port
- 7 External battery connector
- 8 Line input circuit breaker

- 9 Maintenance bypass switch
- 10 Input/Output terminals
- 11 Bypass input circuit breaker
- 12 Output Switch
- 13 Service start
- 14 External Maintenance Bypass Switch connector (EMBS)
- 15 Input DRY port terminals
- 16 Output DRY port terminals

*Product may differ from image



PowerPrime - Online Double Conversion UPS

Three / Single Phase Input and Single Phase Output – Technical Specification

| MODEL | PPRIME 10K V2 | PPRIME 20K V2 |
|------------------------------------|---|------------------------------|
| Power Rating kVA / Watts | 10kVA / 10kW | 20kVA / 20kW |
| INPUT | | |
| Nominal Voltage | 208* / 220 / 230 / 240 VAC (1PH+N+PE) or 380 / 400 / 415 VAC (3Ph+N+PE) | |
| Voltage Range | 110 VAC (Ph+N) ±3% @ 50% load / 176VAC (Ph+N) ±3% @ 100% load | |
| | 300 VAC (Ph+N) ±3% @ 50% load / 276VAC (Ph+N) ±3% @ 100% load | |
| Frequency Range | 46Hz - 54Hz / 56Hz - 64Hz at 60Hz (auto-sensing) | |
| Phase | 3 phase with neutral or 1 phase with neutral (single or dual input) | |
| Power Factor | ≥0.99 @ 100% load | |
| OUTPUT | | |
| Phase | 1 phase with neutral | |
| Nominal Output | 208* / 220 / 230 / 240 VAC | |
| AC Voltage Regulation (Batt. Mode) | ±1% | |
| Frequency Range (Batt. Mode) | 50Hz ±0.1Hz or 60Hz ±0.1Hz | |
| Overload | 46Hz - 54Hz or 56Hz - 64Hz | |
| Current Crest Ratio | 3:1 max | |
| Harmonic Distortion | ≤ 2% @ linear load; ≤5% @ 100% non-linear load | |
| Transfer Time | Zero | |
| Output Power Factor | 1 | |
| EFFICIENCY | | |
| AC Mode | ≥96.6% | |
| ECO Mode | 99% | |
| Battery Mode | ≥95.5% | |
| BATTERY | | |
| Battery Type | VRLA AGM Sealed Lead Acid Maintenance Free Batteries | |
| Battery Numbers (Internal) | 20 (10+10) pcs (max 2 strings 40 pcs) | 40 (20+20) pcs |
| Battery Numbers (External) | 16 (8+8) to 20 (10+10) pcs | 32 (16+16) to 40 (20+20) pcs |
| Recharge Time | 9 hours to recovery to 90% capacity | |
| Charging Current (max.) | 1 to 12A (adjustable via the display) | |
| Nominal Charging Voltage** | ± 136.5 VDC 1% | |
| GENERAL | | |
| Operating Temperature | 0-40°C (the battery life will be affected above 25°C) | |
| Operating Humidity | ≤95% non-condensing | |
| Operating Altitude | ≤1000m** | |
| Acoustic Noise Level | ≤55dB @ 1 metre | ≤58dB @ 1 metre |
| Smart RS232 or USB | Supports Windows 2000/2003/XP/Vista/2008/7/8/10/11, Linux and MAC | |
| Dimensions (mm) WxDxH | 250 x 730 x 827 | |
| Net Weight (kgs) | 43 | 44 |

* Derate capacity up to 90% when the output voltage is adjusted to 208VAC.

** If the UPS is installed or used in a place where the altitude is above than 1000m, the output power must be Derated 1% per 100m.

***Nominal Charge Voltage is for internal battery options. For external battery charge voltage, see user manual

Product specifications are subject to change without further notice.

Note For Parallel operation Derate capacity to 90%

PowerPrime - Online Double Conversion UPS

Three Phase Input and Three Phase Output – Technical Specification



| MODEL | | PPRIME 310 V2 | PPRIME 320 V2 | PPRIME 330 V2 | PPRIME 340 V2 | PPRIME 360 V2 | |
|------------------------------------|-----------|---|------------------------------|-----------------|------------------|-------------------------|------------------|
| Power Rating kVA / Watts | | 10kVA / 10kW | 20kVA / 20kW | 30kVA / 30kW | 40kVA / 40kW | 60kVA / 60kW | |
| INPUT | | | | | | | |
| Nominal Voltage | Low Line | 3 x 380 / 400 / 415 VAC (3PH+N) | | | | | |
| Voltage Range | High Line | 110 VAC (Ph+2) ±3% @ 50% load / 176VAC (Ph+N) ±3% @ 100% load | | | | | |
| | | 300 VAC (Ph+2) ±3% @ 50% load / 276VAC (Ph+N) ±3% @ 100% load | | | | | |
| Frequency Range | | 46Hz - 54Hz / 56Hz - 64Hz at 60Hz (auto-sensing) | | | | | |
| Phase | | 3 phase with neutral | | | | | |
| Power Factor | | ≤0.99 @ 100% load | | | | | |
| OUTPUT | | | | | | | |
| Phase | | 3 phase with neutral | | | | | |
| Nominal Output | | 380 / 400 / 415 VAC (Ph-Ph) and 220 / 230 / 240 VAC (Ph+N) | | | | | |
| AC Voltage Regulation (Batt. Mode) | | ±1% | | | | | |
| Frequency Range (Batt. Mode) | | 50Hz ±0.1Hz or 60Hz ±0.1Hz | | | | | |
| Overload | | 46Hz - 54Hz or 56Hz - 64Hz | | | | | |
| Current Crest Ratio | | 3:1 max | | | | | |
| Harmonic Distortion | | ≤ 2% @ linear load; ≤5% @ 100% non-linear load | | | | | |
| Transfer Time | | Zero | | | | | |
| Output Power Factor | | 1 | | | | | |
| EFFICIENCY | | | | | | | |
| AC Mode | | >95.5% | | | | | |
| ECO Mode | | 98.5% | | | | | |
| Battery Mode | | >94.5% | | | | | |
| BATTERY | | | | | | | |
| Battery Type | | VRLA AGM Sealed Lead Acid Maintenance Free Batteries | | | | | |
| Battery Numbers (Internal) | | 20 (10+10) pcs (max 2 strings 40 pcs) | 40 (20+20) pcs | 32 (16+16) pcs | | External batteries only | |
| Battery Numbers (External) | | 16 (8+8) to 20 (10+10) pcs | 32 (16+16) to 40 (20+20) pcs | | | | |
| Recharge Time | | 9 hours to recovery to 90% capacity | | | | | |
| Charging Current (max.) | | 1 to 12A (adjustable via the display) | | | | | |
| Nominal Charging Voltage** | | ± 136.5 VDC 1% | ± 273VDC ± 1% | ± 218VDC ± 1% | | ± 273VDC ± 1% | |
| GENERAL | | | | | | | |
| Operating Temperature | | 0-40°C (the battery life will be affected above 25°C) | | | | | |
| Operating Humidity | | <95% non-condensing | | | | | |
| Operating Altitude | | <1000m** | | | | | |
| Acoustic Noise Level | | <55dB @ 1 metre | <58dB @ 1 metre | <65dB @ 1 metre | <65dB @ 1 metre | <70dB @ 1 metre | |
| Smart RS232 or USB | | Supports Windows 2000/2003/XP/Vista/2008/7/8/10/11, Linux and MAC | | | | | |
| Dimensions (mm) WxDxH | | 250 x 745 x 827 | | | 300 x 850 x 1007 | | 300 x 980 x 1007 |
| Net Weight (kgs) | | 46 | 47 | 56 | 60 | 74 | |

**If the UPS is installed or used in a place where the altitude is above than 1000m, the output power must be Derated 1% per 100m.

***Nominal Charge Voltage is for internal battery options. For external battery charge voltage, see user manual

Note For Parallel operation Derate capacity to 90%

Product specifications are subject to change without further notice.

The BPC Group

BPC is an international company operating for over 28 years globally, with partners and distributors located around the world.

These regions include:

EUROPE

UK, France, Germany, Gibraltar, Ireland, Netherlands, Malta, Norway, Portugal, Russia.

MIDDLE EAST

Bahrain, Georgia, Iraq, Jordan, Kuwait, KSA, Lebanon, Oman, Qatar, Syria, Turkey, UAE, Yemen.


AFRICA

Algeria, Botswana, Burkina Faso, Democratic Republic of the Congo, Egypt, Ethiopia, Ghana, Kenya, Libya, Mozambique, Nigeria, Rwanda, Sierra Leone, South Africa, Sudan, Tanzania, Uganda, Zambia.

FAR EAST & ASIA

India, Pakistan, Sri Lanka, Indonesia.

To ensure a high level of pre and post sales support is offered, BPC work closely with distributors, providing key commercial and technical training whilst providing competitive costing structures tailored to specific region markets, ensuring the most suitable BPC products are offered. We pride ourselves on long standing relationships with our partners which is reflected in the ongoing support provided locally.

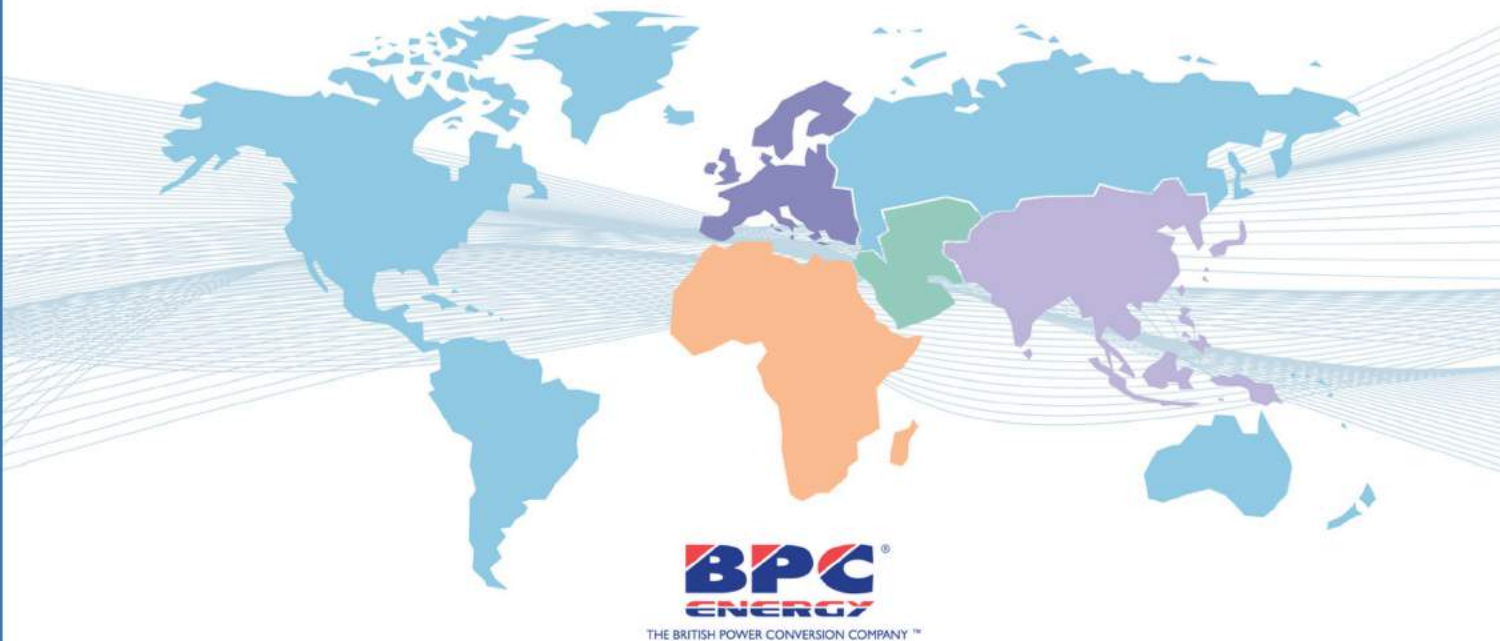

Authorised Distributor