

PowerGem™ Plus RT Series

Single Phase Input & Output – True Online Double Conversion UPS
1kVA – 10kVA

» Sophisticated

» Versatile

» Green Concept Design

VFI



The BPC PowerGem Plus RT is a unique range of high density UPS Systems that can be installed whether on the floor in tower form or in rackmount cabinet configurations powering a wide range of applications.

The PowerGem is an ultra efficient system resulting in improved operational performance up to 97% in ECO mode, 92% in inverter mode and over 90% in battery mode, providing a much greener product with smaller battery and longer autonomy backup times.

The range is equipped with the latest digital signal processor (DSP) technology with versatile features demanded by IT managers enabling integration into all types of networking environments.

- » Data Centres
- » Financial Services
- » Healthcare
- » Networking
- » Telecommunications
- » Mission Critical

PowerGem Plus RT Features

RACK/TOWER CONFIGURATION

The PowerGem Plus RT range is extremely versatile and designed to have the flexibility to use as a floor standing tower type UPS or to be integrated into the client's 19" rack cabinet.

The enhanced programmable LCD display can be manually positioned to suit both modes of operation by simply removing and rotating the display panel.



ADVANCED FUNCTIONAL LCD DISPLAY

The PowerGem Plus RT DSP controlled UPS provides an intelligent high density system suitable for powering a wide range of devices both simply and accurately.

A precise backlit comprehensive LCD display with schematic operation status of the UPS, LED indicators and function keys allowing all the key parameters, alarms and indications to be shown.



ENVIRONMENTALLY FRIENDLY ENERGY SAVING

The intelligent microprocessor based control system allows for the very low power consumption offered by the interactive ECO mode which provides efficiencies as high as 97%. PowerGem Plus RT switches instantaneously to online double conversion operation automatically when the mains becomes unstable and fluctuates outside the normal frequency and voltage parameters.

- True online double conversion
- Digital Signal Processor (DSP) technology
- Wide input voltage (110V – 300V)
- Tower or Rackmount convertible design
- Unity output power factor (optional 0.9pf)
- Hot swappable battery design (optional for 6-10kVA)
- Intelligent self-diagnostics
- Pure Sinewave output
- Multiple communication ports
- Emergency Power Off (EPO) function
- Long runtime versions
- Automatic battery test function
- Configurable battery voltage (6-10kVA)
- ECO mode operation for energy saving
- Programmable frequency converter mode
- Scalable redundancy parallel ready (6-10kVA)
- Dust filter for hazardous environments

WIDE INPUT VOLTAGE

Part of the unique design of the PowerGem Plus RT is to improve the performance in extreme site conditions with a wide input voltage window, ranging from 110 volts to 300 volts, without the need for the system to transfer into Battery Mode.

HOT SWAPPABLE BATTERIES


A key advantage of the PowerGem Plus RT range of UPS is hot swappable batteries as this feature allows the user to replace batteries during operation without interruption to the load.



PowerGem Plus RT Features

UNITY POWER FACTOR

The PowerGem Plus RT range adopts DSP and highly efficient electronic IGBT inverter technology providing one of the highest power density ratios in the UPS industry. Advanced inverter circuitry delivers unity power factor maximising power output.

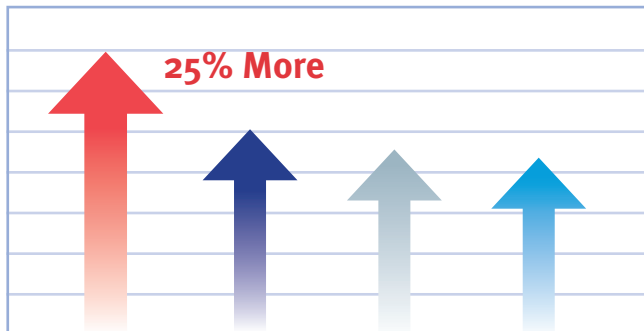

PARALLEL READY N+X REDUNDANCY

The PowerGem Plus RT 6-10kVA models are able to be connected directly to the user's distribution system. Models can be used in simple parallel operation with up to 4 units, allowing scalability for increased power capacity and improved reliability due to the redundancy operation. The parallel system can be connected to a common battery if required.



PROGRAMMABLE FREQUENCY CONVERTER

The PowerGem Plus RT range may be used as a frequency converter. Simple programming through the front LCD panel will allow you to lock the output frequency at 50Hz or 60Hz to suit frequency sensitive equipment.

CONFIGURABLE BATTERY VOLTAGE

Each 6-10kVA UPS within the range has the flexibility to configure battery voltages from a 20 block system to either 16 or 18 blocks depending on application and runtime requirements.

COMMUNICATION INTERFACE

This feature will allow either the USB or RS232 communication port to work with an SNMP simultaneously. The internal slot is provided for remote control and monitoring agents like SNMP or relay cards.



LOW NOISE LEVEL

More often the PowerGem Plus RT range will be installed in an office workspace and the environment will be an important factor in the design. Therefore, by using modern high frequency technology the noise dissipation is reduced to less than 50dBA for smaller units.

LONG RUNTIME APPLICATIONS

For mission critical applications requiring longer runtimes additional matching battery cabinets can be added. These have been designed both technically and aesthetically to complement the UPS, forming a combined unit which can be easily located without the need for special site considerations.

For business continuity requiring very long runtimes the PowerGem range offers larger built-in chargers which can be adjusted from the LCD control panel to provide faster recharge capability.




PowerGem Plus RT

Technical Specification for the 1-3kVA



MODEL		PGPRT 1000 (L)	PGPRT 2000 (L)	PGPRT 3000 (L)
Power Rating VA / Watts		1000VA / 1000W	2000VA / 2000W	3000VA / 3000W
INPUT				
Nominal Voltage		200 / 208 / 220 / 230 / 240 Vac		
Voltage Range		110 - 300 Vac (load dependent)		
Frequency Range		40 - 70 Hz		
Power Factor		≥0.99 @ 100% Load		
OUTPUT				
Nominal Voltage		200 / 208 / 220 / 230 / 240 Vac		
AC Voltage Regulation (Battery Mode)		±1%		
Frequency Range (Synchronised Range)		47 - 53 Hz or 57 - 63 Hz		
Frequency Range (Battery Mode)		50/60 Hz ±0.1% Hz		
Crest Factor		3:1		
Harmonic Distortion (Linear Mode)		≤3% THD		
Transfer Time (AC to Battery)		Zero		
Waveform		Pure Sinewave		
EFFICIENCY				
AC Mode		≥88%	≥92%	≥92%
ECO Mode		≥95%	≥97%	≥97%
Battery Mode		≥86%	≥88%	≥90%
BATTERY				
Battery Type		VRLA AGM Sealed Lead Acid Maintenance Free Batteries		
Battery DC Voltage		24 or 36 volts	48 volts	72 volts
Typical Recharge Time		4 hours recover to 90% capacity		
Charging Current (max.)	Standard Models	1A		
	Long Runtime Models	12A adjustable by LCD display		
GENERAL				
Operating Humidity		20 - 90% RH @ 0 - 40°C (non-condensing)		
Acoustic Noise Level		≤50 dB @ 1 metre		
Management Software		Included		
Standard Model	Dimensions (mm) WxDxH	438 x 305 x 88	438 x 460 x 88	438 x 600 x 88
	Net Weight (kgs)	11.3	19.1	26.2
Long Runtime Model	Dimensions (mm) WxDxH	438 x 305 x 88	438 x 435 x 88	
	Net Weight (kgs)	5.6	8.3	8.6

- Output Receptacles (10A)
- Battery Terminal
- SNMP Intelligent Slot
- Network/Fax/Modem Surge Protection
- RS-232 Communication Port
- AC Input
- Input Circuit Breaker
- EPO
- USB Communication Port
- Output Receptacle (16A)

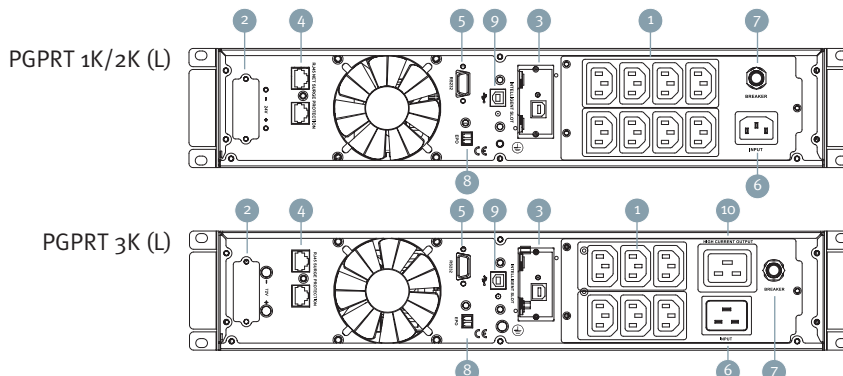


PowerGem Plus RT

Technical Specification for the 6-10kVA



MODEL		PGPRT 6000	PGPRT 10K
Power Rating VA / Watts		6kVA / 6kW	10kVA / 10kW
INPUT			
Nominal Voltage		220 / 230 / 240 Vac	
Voltage Range		120 - 276 Vac (load dependent)	
Frequency Range		42 - 55 Hz at 50 Hz / 54 - 66 Hz at 60 Hz (auto sensing)	
Power Factor		>0.99 @ 100% Load	
OUTPUT			
Nominal Voltage		220 / 230 / 240 Vac	
AC Voltage Regulation (Battery Mode)		±1%	
Frequency Range (Synchronised Range)		45 - 65 Hz (auto select)	
Frequency Range (Battery Mode)		50/60 Hz ±0.1 Hz	
Crest Factor		3:1	
Harmonic Distortion (Linear Mode)		≤3% THD	
Transfer Time (AC to Battery)		Zero	
Waveform		Pure Sinewave	
EFFICIENCY			
AC Mode		>92.5%	
ECO Mode		>97.3%	
Battery Mode		>89%	>88%
BATTERY			
Battery Type		VRLA AGM Sealed Lead Acid Maintenance Free Batteries	
Battery DC Voltage		External matching battery cabinet – 192/216/240 volts	
Typical Recharge Time		4 hours recover to 90% capacity	
Charging Current (max.)		10A adjustable by LCD display	
GENERAL			
Operating Humidity		20 - 90% RH @ 0 - 40°C (non-condensing)	
Acoustic Noise Level		<55 dB @ 1 metre	
Management Software		Included	
UPS Module	Dimensions (mm) WxDxH	438 x 725 x 88	
	Net Weight (kgs)	15	16
BCRT20No09 Battery Cab.	Dimensions (mm) WxDxH	438 x 585 x 133	
	Net Weight (kgs)	64	

- 1 Input and Output Terminals
- 2 Battery Terminal
- 3 SNMP Intelligent Slot
- 4 PDU Communication
- 5 RS232 Communication Port
- 6 EPO
- 7 USB Communication Port
- 8 Parallel Port 1
- 9 Parallel Port 2

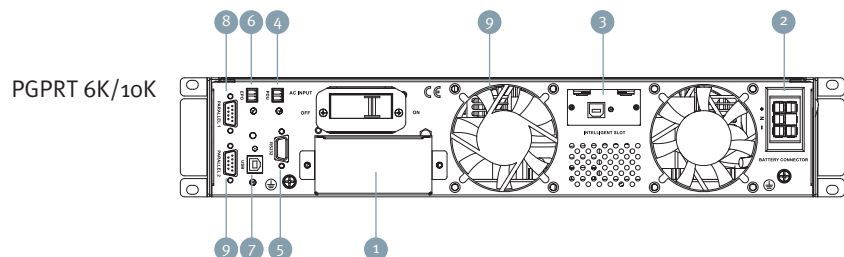

The BPC Group

BPC is an international company operating for 20 years globally, with partners and distributors located around the world.

These regions include:

EUROPE

UK, France, Germany, Gibraltar, Ireland, Netherlands, Malta, Norway, Portugal.

MIDDLE EAST

Bahrain, Jordan, Kuwait, KSA, Lebanon, Oman, Qatar, UAE, Yemen.


AFRICA

Burkina Faso, Democratic Republic of the Congo, Egypt, Ethiopia, Kenya, Ghana, Libya, Nigeria, Rwanda, Sierra Leone, Sudan, Tanzania, Uganda, Zambia.

FAR EAST & ASIA

India, Pakistan, Sri Lanka.

To ensure a high level of pre and post-sales support is offered, BPC work closely with distributors, providing key commercial and technical training whilst providing competitive costing structures tailored to specific region markets, ensuring the most suitable BPC products are offered. We pride ourselves on long standing relationships with our partners which is reflected in the ongoing support provided locally.

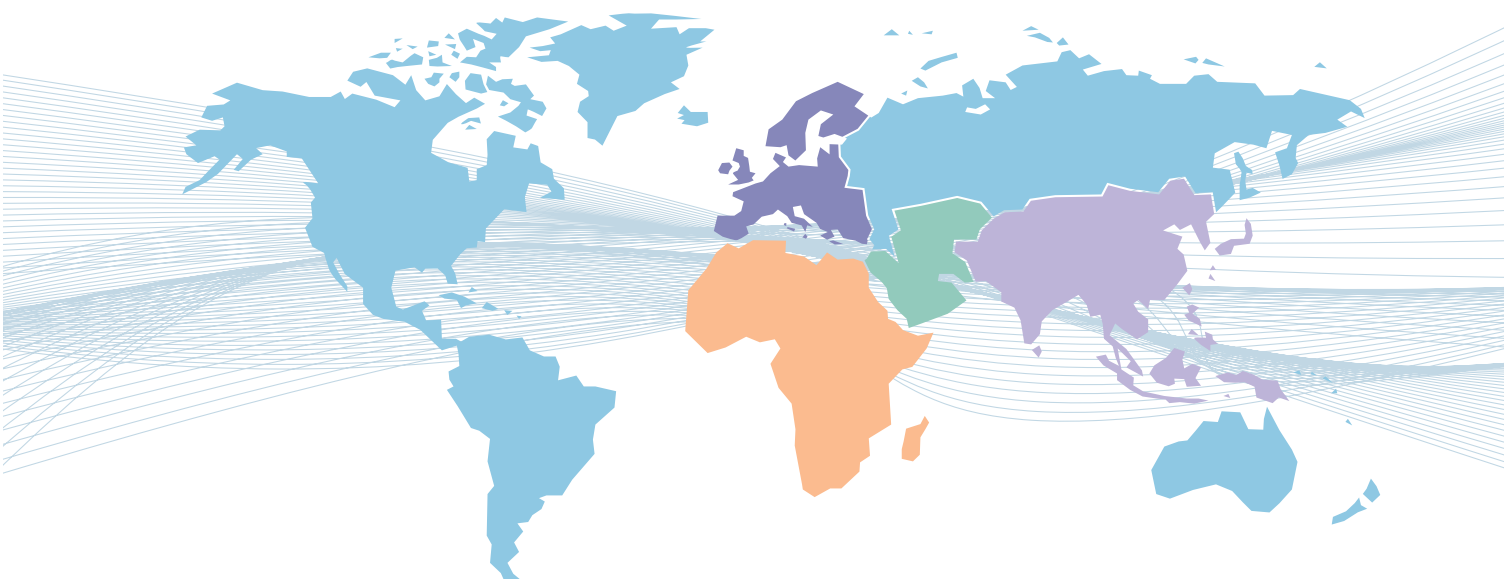

Authorised Distributor



BPC Energy Limited

BPC House
Romsey Industrial Estate
Greatbridge Road
Romsey
Hampshire SO51 0HR
United Kingdom

Tel: +44 (0) 1794 521200
Fax: +44 (0) 1794 521400
e-mail: sales@bpc-ups.com

